


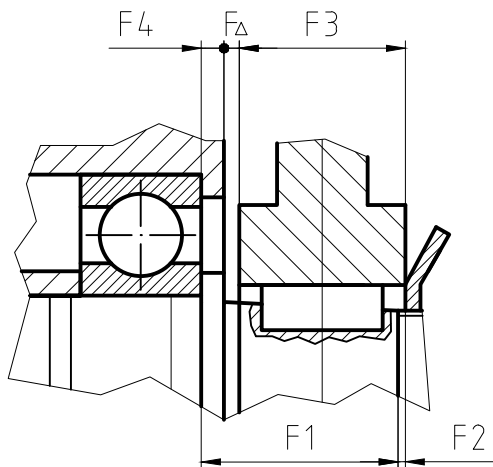

VELKÁ ŘEMENICE / DOMEK

$$F_1 = 13 \pm 0,2$$

$$T_{F1} = 0,4$$

$$F2 = 1 \pm 0,5$$

$$T_{F2} = 1$$

$$F3 = 11 \pm 0,2$$

$$T_{F3} = 0,4$$

$$F4 = 1,5 \pm 0,1$$

$$T_{F4} = 0,2$$

$$F_{\Delta} = ?$$

$$T_{F_{\Delta}} = T_{F1} + T_{F2} + T_{F3} + T_{F4}$$

$$T_{E_{\Delta}} = 0,4 + 1 + 0,4 + 0,2 = 2$$

$$F_{\Delta \max} = F_{1 \max} + F_{2 \max} - F_{3 \min} - F_{4 \min}$$

$$F_{\Delta \max} = 13,2 + 1,5 - 10,8 - 1,4 = 2,5 \text{ mm}$$

$$F_{\Delta \min} = 12,8 + 0,5 - 11,2 - 1,6 = 0,5 \text{ mm}$$

$$T_{F_{\Delta}} = 2$$

$$F_{\Delta} = 1,5 \pm 1 \rightarrow \text{OK}$$